


K LINE • Converters / Isolators

6,2 mm housing

K121

Universal Converter (RTD, TC, Ohm, mA, V) to 4..20mA (loop powered)

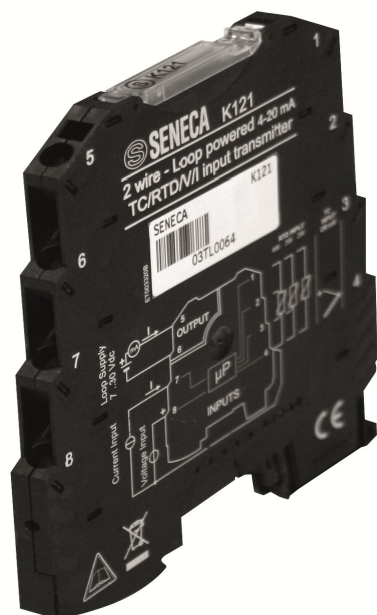

ALL-IN-ONE LOOP POWERED CONVERTER

CE

Power supply
Universal Input

7..30 Vdc
Thermocouple (J,K,R,S,T,B,E,N)
RTD (PT100-500-1000-Ni100) with 2,3,4 wire connections
Voltage -150...+150mV, -30...+30V

Output
Galvanic isolation
Configuration
Operating temperature

Current -24...+24mA
Potentiometer 500 Ω -10 K Ω
Resistance up to 1760 Ω
4..20 mA (loop powered)
1,5 kVac
Through EASY-LP software (s117p)
-20..+65 $^{\circ}$ C



K121

Universal Converter (RTD, TC, Ohm, mA, V) to 4..20mA (loop powered)



ORDER CODE

Model	K121	Universal Converter (RTD, TC, Ohm, mA, V) to 4..20mA (loop powered)
Programming Kit	S117P	Easy-LP software + USB adapter

TECHNICAL FEATURES

GENERAL FEATURES

Power supply	7..30 Vdc
Power consumption	< 660 mW
Channels number	1 input, 1 outputs
Galvanic isolation	1.5 kVac, 2 ways
Power supply on side terminals	Yes
Programming	Via Easy-LP program, using S117P (USB adapter)
Dimensions (wxhxd)	6.2 x 93.1 x 102,5 mm
Operating temperature	-20..+65°C
Connections	Spring clamps (EN 60175)
Approvals	CE, EN 61000-6-4, EN 64000-6-2, EN 61010-1

INPUT

Channels	1
Potentiometer	From 500Ω to 10 KΩ, Input impedance 10 MΩ
Thermocouple	Type J,K,R,S,T,B,E,N, Input impedance 10 MΩ, cold junction compensation -40 ..65 ± 1,5°C Settable, fault sensor detection settable
RTD / Resistance	Type PT100-500-1000-Ni100 with 2,3,4 wire connections, Excitation current 375 μA
Voltage (mV)	-150...+150 mV, Input impedance 10 MΩ
Voltage (V)	-30...+30 V, Input impedance 200 KΩ
Current	-24...+24 mA, Input impedance 40 Ω

TABLE OF INPUT RANGE


	Input	Range	Calibration error	EMI	Minimum Span	Resolution	Standard
Thermocouple	J	-210..1200 °C	0,1 %	< 0,5 %	50 °C	5 μV	EN 60584
	K	-200..1372 °C	0,1 %	< 0,5 %	50 °C	5 μV	EN 60584
	R	-50..1768 °C	0,1 %	< 0,5 %	100 °C	5 μV	EN 60584
	S	-50..1768 °C	0,1 %	< 0,5 %	100 °C	5 μV	EN 60584
	T	-200..400 °C	0,1 %	< 0,5 %	50 °C	5 μV	EN 60584
	B	0..1820 °C	0,1 %	< 0,5 %	100 °C	5 μV	EN 60584
RTD	E	-200..1000 °C	0,1 %	< 0,5 %	50 °C	5 μV	EN 60584
	N	-200..1300 °C	0,1 %	< 0,5 %	50 °C	5 μV	EN 60584
	Ni100	-60..250 °C	0,1 %	< 0,5 %	20 °C	6 mΩ	DIN 43760
	Pt100	-200..650 °C	0,1 %	< 0,5 %	20 °C	6 mΩ	EN 60751
Voltage	Pt500	-200..650 °C	0,1 %	< 0,5 %	20 °C	28 mΩ	
	Pt1000	-200..200 °C	0,1 %	< 0,5 %	20 °C	28 mΩ	
Potent.	mV	-150..150 mV	0,1 %	< 0,5 %	2,5 mV	5 μV	
Resist.	Ω	500..10000Ω	0,1 %	< 0,5 %	10 %	0,0015 %	
Resist.	Ω	0..400 Ω	0,1 %	< 0,5 %	10 Ω	6 mΩ	
Resist.	Ω	0..1760 Ω	0,1 %	< 0,5 %	10 %	28 mΩ	
Voltage	V	-30..30 Vdc	0,1 %	< 0,5 %	0,5 V	~ 1 mV	
Current	mA	-24..24 mA	0,1 %	< 0,5 %	0,5 mA	~ 1 μA	

OUTPUT

Channels	1
Type	4..20 mA (loop powered)
Load resistance	1 KΩ @ 28 Vdc, 21 mA
Resolution	2 μA (< 13 bit)
Output in case of over-range	+ 2,5% of end scale, - 2,5% of start scale
Output in case of fault	+ 5% of end scale, - 5% of start scale

SCHEMES, PROGRAMMING

INPUTS

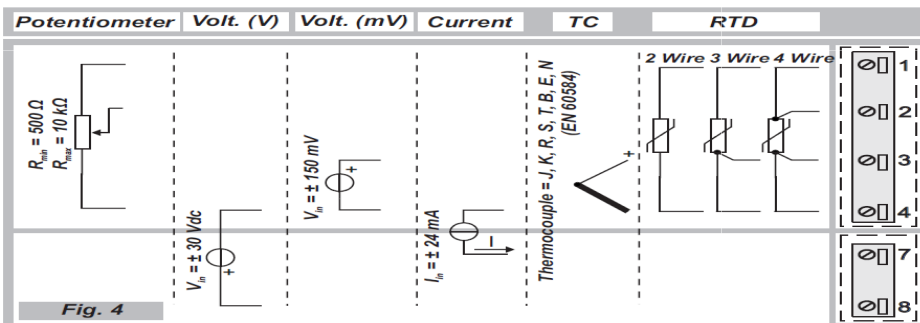

OUTPUT & POWER SUPPLY






DIAGRAM: LOAD RESISTANCE VS VOLTAGE



EASY-LP SOFTWARE SCREENSHOTS

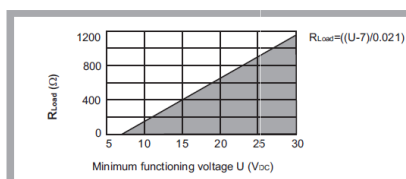

CONFIGURATION

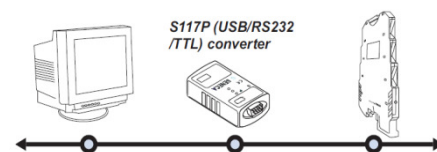

via Germania, 34 • 35127 Padova - Italy - Ph +39 049 87.05.359 (.408)
Fax +39 049 87.06.287 • www.seneca.it • info@seneca.it

Document subject to modifications and revisions. Reproduction forbidden if not authorized.